

OQxxB1510000G




OQ xx B 1 x 1 xxxx G

No. OF POLES
02: 2 POLES
:
24: 24 POLES

Color
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)

G: Pb<4000ppm
0000: "@" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by customer request, please contact sales department.



Pitch	3.50 mm
Poles	2 P a 24 P
Rated	300V 10A
Wire	

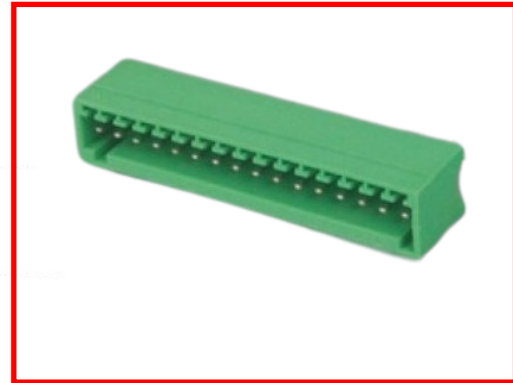

Borna macho acodada paso 2,50 mm circuito impreso

Electrical

Safety category:	cULus
Voltage rating:	125V
Current rating:	4 A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque:	
Screw:	
Wire strip length:	
Withstanding Voltage:	1.25 KV
Safety Approval:	
Operating temperature:	-40°C to +115°C
Soldering temperature:	

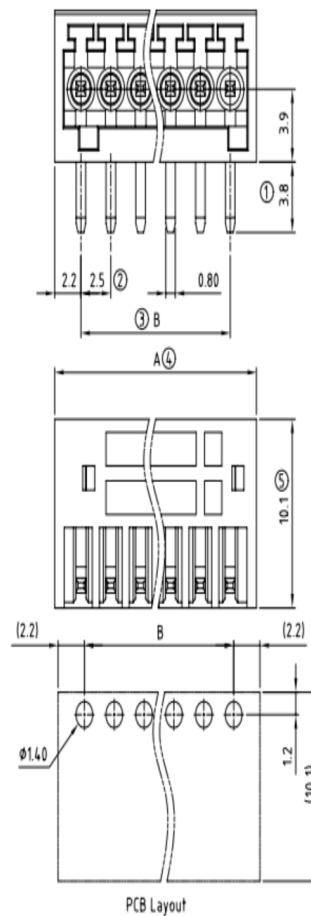

SERIE OQ